

Specifications

Recommended operating pressure: 150 - 500kPa
 Maximum pressure rating: 1200kPa
 Maximum working temperature: 80°C

FLEXIBLE WATER HOSE ELBOW CONNECTOR

- PEX inner core for durability
- High-density 304 stainless steel braiding with rust resistance and higher bend capacity
- Stainless steel ferrule and chrome plated DR brass end fittings
- Quality silicon washers preventing damage caused by over-tighten and aging


DEMIENSIONS

Length: 225mm, 300mm & 450mm
 Connection: 15mm FI x 15mm FI
 Inner Diameter: 8mm

WARRANTY

10 years limited warranty*

**Please visit www.acplumbingsupplies.com.au for warranty details*

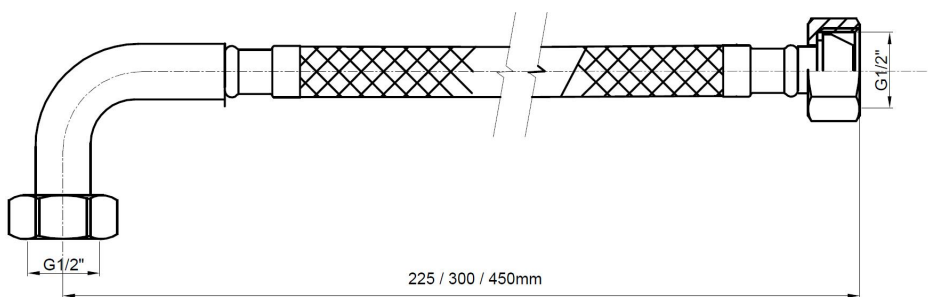

WaterMark

AS/NZS 3499:2006



AUSTRALIAN CONSOLIDATED PLUMBING