



Specifications

Recommended operating pressure: 150 - 500kPa
 Maximum pressure rating: 1200kPa
 Maximum working temperature: 80°C

FLEXIBLE WATER HOSE STRAIGHT CONNECTOR

- PEX inner core for durability
- High-density 304 stainless steel braiding with rust resistance and higher bend capacity
- Stainless steel ferrule and chrome plated DR brass end fittings
- Quality silicon washers preventing damage caused by over-tighten and aging


DEMIENSIONS

Length: 150mm, 225mm, 300mm, 450mm, 600mm, 750mm, 1000mm & 1500mm
 Connection: 15mm FI x 15mm FI
 Inner Diameter: 8mm

WARRANTY

10 years limited warranty*

**Please visit www.acplumbingsupplies.com.au for warranty details*

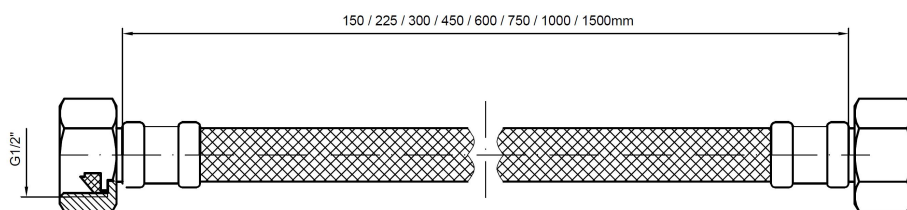

WaterMark

AS/NZS 3499:2006



AUSTRALIAN CONSOLIDATED PLUMBING

T: 1300 020 269 F: 02 8105 9839 E: Info@acplumbingsupplies.com.au

23 Seton Rd, Moorebank, NSW 2170 www.acplumbingsupplies.com.au

Relino Tapware is registered trade mark of Australian Consolidated Plumbing.